



# Cylindrical Crystal

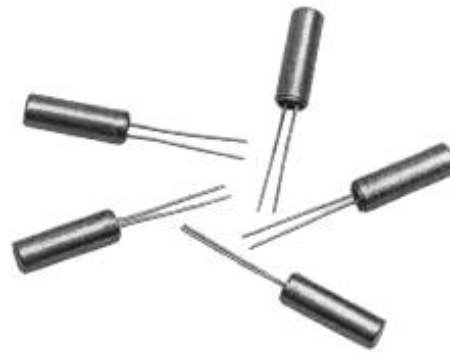

## Specifications:

Crystal Holder	A: .244" x .079" dia.(6.2mm x 2.0mm dia.) B: .354" x .118" dia.(9.0mm x 3.0mm dia.)	
Frequency Range	A: 11.0592 - 70.0000 MHz B: 1.0000 MHz B: 3.579545 - 100.0000 MHz	AT-cut SL-cut AT-cut
Frequency Tolerance	100PPM 15PPM to 100PPM	SL-cut AT-cut
Frequency Stability*	±5PPM from 0° C. to +50° C. to ±50PPM from -20° C. to +70° C.	
Shunt Capacitance	7pF Max.	
Load Capacitance	10pF to 32pF or Series Resonant	
Drive Level	0.1 mW Max.	

\*SL-cut is ±100PPM from -10° C. to +60° C.

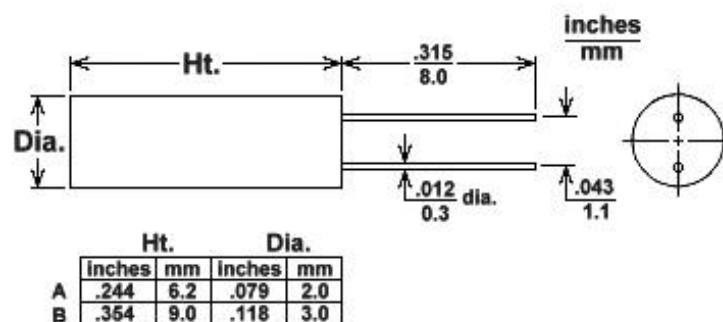

To Order ~ Phone: 1-800-526-3935 ~ Fax: 1-800-777-2197  
[www.bomarcystal.com](http://www.bomarcystal.com) ~ e-mail: [sales@bomarcystal.com](mailto:sales@bomarcystal.com)